
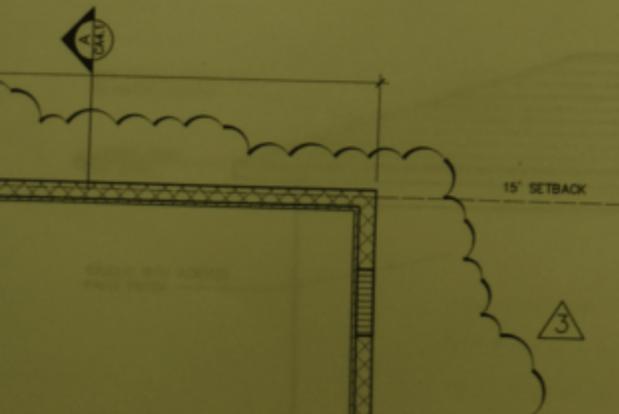


DOOR SCHEDULE												
DOOR MARK	# OF DOOR LEAVES	SIZE			MATERIAL		FRAME			ELEVATION LABEL	HARDWARE	REMARKS
		WIDTH (PER LEAF)	HEIGHT	THICKNESS	ALUM. CLAD WOOD	WOOD	SOLID WOOD					
101A	4	3'6"	9'0"	1 1/2"	•		•			A		IMPACT RATED SLIDING DOOR
101B	2	3'0"	9'0"	1 1/2"	•		•			B		IMPACT RATED SLIDING DOOR
102A	4	3'6"	9'0"	1 1/2"	•		•			A		IMPACT RATED SLIDING DOOR
102B	2	3'0"	9'0"	1 1/2"	•		•			B		IMPACT RATED SLIDING DOOR
103A	1	2'6"	8'0"	1 1/2"	•	•	•			C		
103A	1	2'6"	8'0"	1 1/2"	•		•			C		
103A	1	2'6"	8'0"	1 1/2"	•		•			C		
103A	1	2'6"	8'0"	1 1/2"	•		•			C		

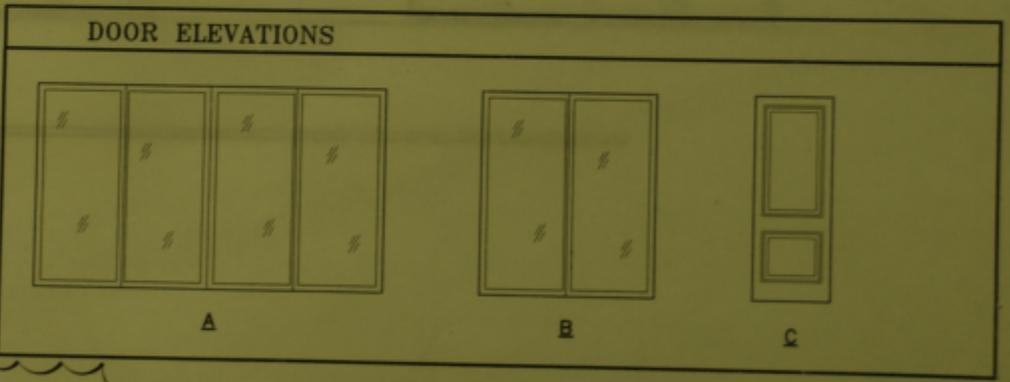

ALTERNATION PROJECT PROCEDURES

PREPARATION:

1. CUT, MOVE OR REMOVE ITEMS AS NECESSARY FOR ACCESS TO ALTERNATIONS AND RENOVATIONS WORK; REPLACE AND RESTORE AT COMPLETION
2. REMOVE UNSUITABLE MATERIAL NOT MARKED FOR SALVAGE, SUCH AS ROTTED WOOD, RUSTED METALS DETERIORATED MASONRY AND CONCRETE; REPLACE MATERIALS AS SPECIFIED FOR FINISHED WORK. REMOVE DEBRIS AND ABANDONED ITEMS FROM AREA AND FROM CONCEALED SPACES
3. PREPARE SURFACES AND REMOVE SURFACE FINISHES TO PROVIDE

DEMOLITION NOTES FOR REMODELING

REQUIREMENTS

1. WORK INCLUDED:
 - A. REMOVE DESIGNATED BUILDING EQUIPMENT AND FIXTURES.
 - B. REMOVE DESIGNATED PARTITIONS AND COMPONENTS.
 - C. CAP AND IDENTIFY EXPOSED UTILITIES.
 - D. PROVIDE TEMPORARY PARTITIONS TO ALLOW CONTINUED BUILDING OCCUPANCY BY OWNER.

PROTECTION

ALL WORK MUST CONFORM TO THE 2004 FLORIDA BUILDING CODE



BRIDGES, MARSH, & ASSOCIATES, INC.
 CHARTERED ARCHITECTS
 Eighteen Via Mizner
 Palm Beach, Florida 33480
 Phone: (561) 832 1030
 Fax: (561) 832 1500

M. J. [Signature]
 12/12/07

Cabana Addition to 358 El Brillo Way

PALM BEACH, FLORIDA

FLOOR PLAN