

# Miele

## W1 Washing Machine

### SPECIFICATIONS

Unit Width	23½" (596 mm)
Unit Height	33½" - 34¾" (850 - 882 mm)
Unit Depth- Excluding Door Dimension	23⅝" (600 mm)
Unit Depth- Including Door Dimension	25⅝" (643 mm)
Door Clearance	18¼" (463 mm)
<b>Built-In</b>	
Minimum Cabinet Opening Width	23½" (596 mm)
Minimum Cabinet Opening Height	33½" (850 mm)
<b>Interior Volume</b>	
Drum Volume	2.26 cft (64 L)
Rated Load Capacity	17.6 lbs (8 kg)
<b>Plumbing</b>	

**Water Supply Requirements** May be connected to a cold and hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/4" GHT. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 psi (1 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed.

**Water Connection Line** 5' 3" (1.6m) flexible water intake hose is supplied with a 3/4" GHT connection.

**Drain Hose** 5' (1.5m) flexible drain hose is supplied. May be extended up to 16'5" (5 m). Delivery head must not exceed 3' 3" (1 m)

### Electrical

**Electrical Requirements** 120V, 60Hz, 15A  
220V, 30A, 60Hz (Used with NEMA Adapter)

**Power Cord** NEMA 5-15 plug, 5'3" ft (1.6 m)

### Shipping

**Shipping Weight** 231 lbs (105 kg)

**Shipping Dimensions** 26" W x 37" H x 27 ⅜" D

### Support

**Call Miele** (800) 999-1360

**Miele Website** [www.mieleusa.com](http://www.mieleusa.com)

**20/20 Link** [2020technologies.com](http://2020technologies.com)



WWH 860 WCS  
Item# 11WH8605USA



WWH 660 WCS  
Item# 11WH6605USA




WWF 060 WCS  
Item# 11WF0605USA

### Installation Accessories:



WTV 502  
Stacking kit



WTV 512  
Stacking kit with drawer



WTS 510  
Stacking kit with drawer




NEMA Adapter  
NEMA 14-30/2x5-15 Adapter




W1 Washing Machine

PRODUCT VIEWS

Isometric View

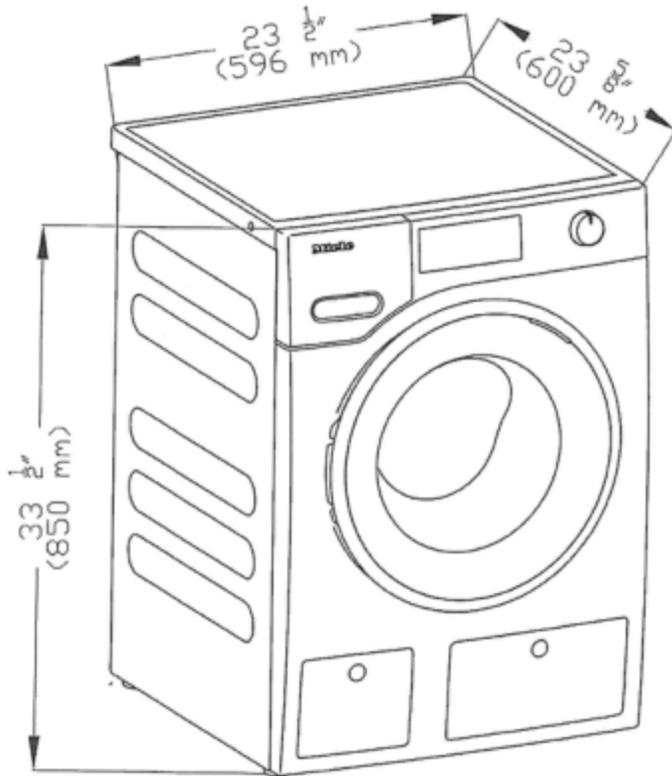


Front View

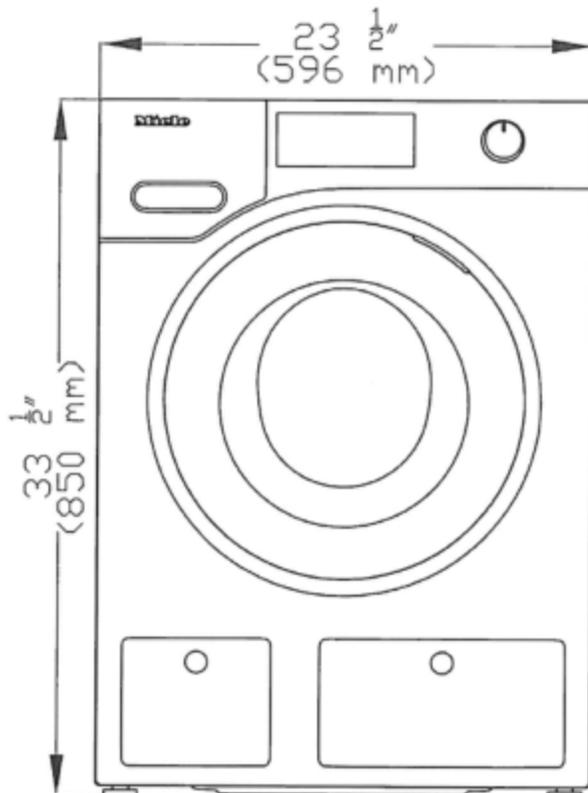



W1 Washing Machine

Built-in Niche

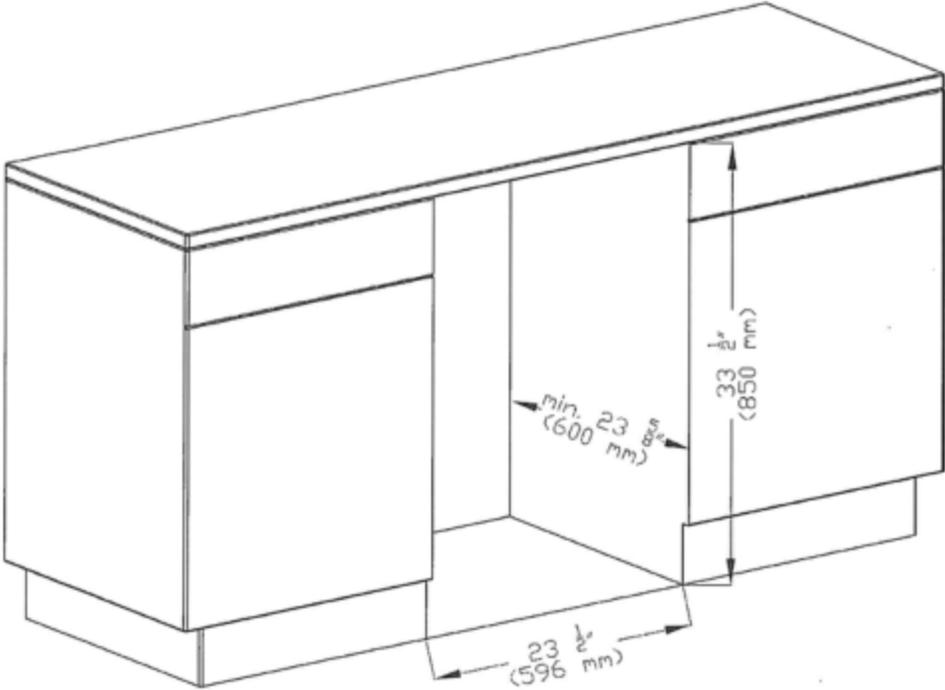


## T1 Ventless Heat Pump Dryer

### SPECIFICATIONS

Unit Width	23 <sup>1</sup> / <sub>2</sub> " (596 mm)
Unit Height	33 <sup>1</sup> / <sub>2</sub> " - 34 <sup>3</sup> / <sub>8</sub> " (850 - 882 mm)
Unit Depth- Excluding Door Dimension	23 <sup>5</sup> / <sub>8</sub> " (600 mm)
Unit Depth- Including Door Dimension	25 <sup>5</sup> / <sub>16</sub> " (643 mm)
Door Clearance	18 <sup>1</sup> / <sub>4</sub> " (463 mm)
<b>Built-In</b>	
Minimum Cabinet Opening Width	23 <sup>1</sup> / <sub>2</sub> " (596 mm)
Minimum Cabinet Opening Height	33 <sup>1</sup> / <sub>2</sub> " (850 mm)
Interior Volume	
Drum Volume	4.1 (116 L)
Rated Load Capacity	17.6 lbs (8 kg)
<b>Plumbing</b>	
Drain Hose	5' 3" (1.6 m) flexible drain hose is supplied. May be extended up to 13' (4 m) Delivery head must not exceed 5' (1.5 m)
<b>Electrical</b>	
Electrical Requirements	120V, 60Hz, 15A 220V, 30A, 60Hz (Used with NEMA Adapter)
Power Cord	NEMA 5-15 plug, 6'7" ft (2 m)
<b>Shipping</b>	
Shipping Weight	145 lbs (66 kg)
Shipping Dimensions	26" W x 37" H x 27 <sup>3</sup> / <sub>16</sub> " D
<b>Support</b>	
Call Miele	(800) 999-1360
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>



TWI 180 WP  
Item# 12WI1802USA

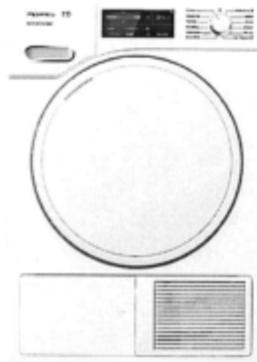


TWF 160 WP  
Item# 12WF1602USA

### Installation Accessories:



WTV 502  
Stacking kit



WTV 512  
Stacking kit with drawer



WTS 510  
Stacking kit with drawer




NEMA Adapter  
NEMA 14-30/2x5-15 Adapter




T1 Ventless Heat Pump Dryer

PRODUCT VIEWS

Isometric View

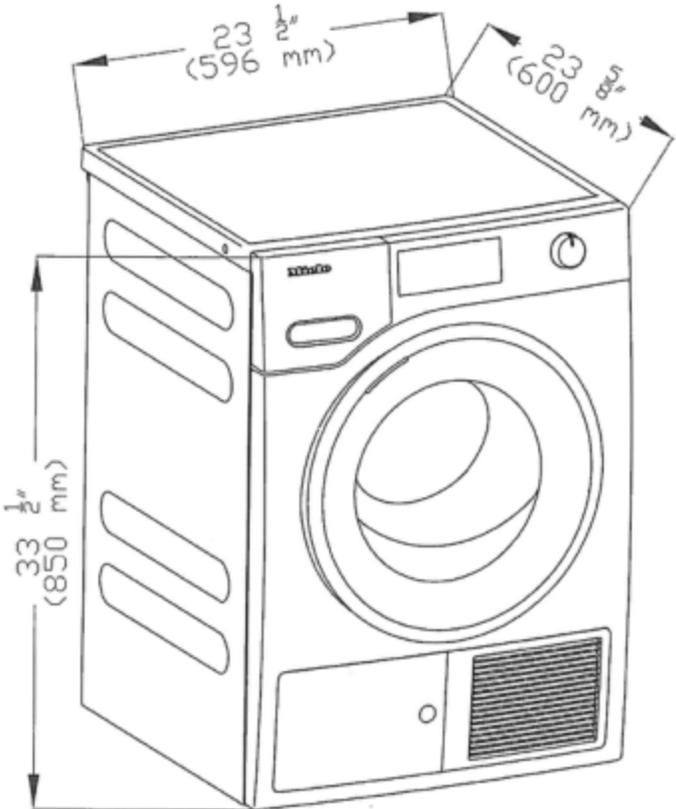

Front View

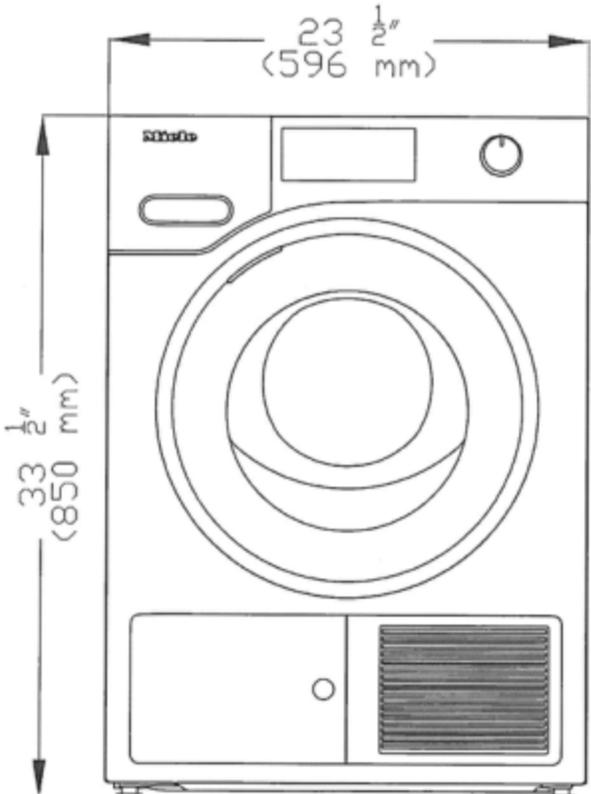



T1 Ventless Heat Pump Dryer

Built-in Niche

