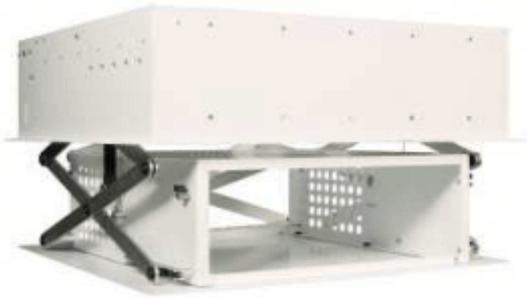


Item	DESCRIPTION	QTY		Unit Price (excluding VAT)	Total Price (excluding VAT)
	<p>Further to our on-site audit, we have come to the conclusion that your audio-video installation in the library room is obsolete and out of order.</p> <p>Therefore, we can offer you to install the latest generation of HD audio-video system.</p> <p>All the speakers will be replaced with high fidelity ones from the brand Bowers&Wilkins. The video system will consist of an Apple TV, an HD Bluray player and a new TV-box decoder. You will be able to play all these video sources on a larger motorized projection screen, and you will also have an HD videoprojector inside a motorized lift.</p> <p>You will easily control your whole audio-video installation with an handheld touch screen remote.</p>				

Item	DESCRIPTION	QTY	Unit Price (excluding VAT)	Total Price (excluding VAT)
HOME CINEMA				
1	Video sources			
1.1	TV-box decoder Supplied by your TV provider. 			Supplied
1.2	Apple TV Supply of a 4th generation Apple TV , storage space of 32Go. 	1	149,00 €	149,00 €
1.3	Bluray player Supply of a multiregions Bluray player, BDP-103EU model from Oppo . 	1	706,00 €	706,00 €

Item	DESCRIPTION	QTY	Unit Price (excluding VAT)	Total Price (excluding VAT)
2	Distribution and Amplification			
	<p>Home Cinema 5.1 amplifier</p> <p>Supply of a home cinema amplifier, AVR-X3200W model from Denon.</p> 	1	1 100,00 €	1 100,00 €
3	Audio diffusion			
3.1	<p>Satellite speakers</p> <p>Supply of satellite speakers, M-1 MK2 model from Bowers&Wilkins.</p> 	5	206,00 €	1 030,00 €
3.2	<p>Subwoofer</p> <p>Supply of a floorstanding subwoofer, integrated in a piece of furniture ASW608 model from Bowers&Wilkins.</p> 	1	408,00 €	408,00 €

Item	DESCRIPTION	QTY	Unit Price (excluding VAT)	Total Price (excluding VAT)
4	Video diffusion			
4.1	<p>Videoprojector</p> <p>Supply of a Full HD videoprojector, VPL-HW65ES model from Sony.</p> 	1	2 499,00 €	2 499,00 €
4.2	<p>Motorized lift</p> <p>Supply of a motorized lift for the videoprojector, custom-made with an extra-drop of 1,5m and an in-ceiling mounting, PD3.5 model from Future Automation.</p>  <p>This lift will bring down the videoprojector to an optimum height of diffusion.</p> <p>Make sure the painter, staffor and carpenter will take care of the cutting in the decorative ceiling.</p>	1	7 623,00 €	7 623,00 €

Item	DESCRIPTION	QTY		Unit Price (excluding VAT)	Total Price (excluding VAT)
4.3	<p>Projection screen Supply of a motorized projection screen with an custom mounting from ScreenResearch. Image width of 3,5m, reverse roll motorisation and custom-made extra drop of 1m.</p>  <p>Make sure the carpenter will made a custom box in order to integrate the motorization.</p>	1		8 892,00 €	8 892,00 €

Home Cinema

Item	DESCRIPTION	QTY	Unit Price (excluding VAT)	Total Price (excluding VAT)
5	Control system			
5.1	Remote control Supply of a wireless remote control with a 3" touch screen, TSR-302 line from Crestron . 	1	1 362,00 €	1 362,00 €
5.2	Control processor Supply of a managing control system, MC3 model from Crestron . 	1	1 677,00 €	1 677,00 €

Home Cinema

Item	DESCRIPTION	QTY	Unit Price (excluding VAT)	Total Price (excluding VAT)
6	Labour			
6.1	Cabling Supply of the HDMI, Cat6 and audio cables to install the home cinema. Cable passage in the false ceiling and the existing arrangement.	1	3 913,00 €	3 913,00 €
6.2	Installation, Connection, Programming and Commissioning Removal of the existing equipment. Installation and connection of the video sources, the home cinema amplifier and the control processor inside the audio-video piece of furniture. Installation and connection of the satellite speakers on the walls and of the subwoofer inside the piece of furniture. Installation and connection of the videoprojector, the motorized lift and the projection screen. Configuration of the audio-video equipment. Graphic Design of the remote control. Programming of the control processor. Tests, adjustments and on-site implementation The carpenter will eventually have to mend the audio video piece of furniture.	1	11 406,00 €	11 406,00 €
TOTAL HOME CINEMA (excluding tax)				40 765,00 €
V.A.T. 20%				8 153,00 €
TOTAL HOME CINEMA (including tax)				48 918,00 €

Nota:

Any additional work will be preceded by a specific quotation, signed by client before work to be done.

Terms of payment:

- 50% when placing the order, with signed quotation. Payment to be done in 10 days.

Total amount with final invoice, after project reception. Payment to be done in 10 days.

THE CLIENT

Signature and company stamp, preceded by the mention "Agreed and signed"

THE COMPANY

L. Sherman

It is an invoicing document

Any controversy or dispute shall be brought before the competent Tribunal in accordance with the law.