



Modern Architectural Side Lever Pulldown High Spout Kitchen Faucet

ROHL Modern Kitchen

LS57L*

FEATURES


- Dual spray modes
- Metal lever only
- Brass construction
- 1 3/4" max. installation depth on deck
- Ceramic disc control cartridge
- Complements Modern Architectural
- 10" reach C-spout, dual function pulldown spray
- 20" maximum hose extension

FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel

WARRANTY

- Limited Lifetime

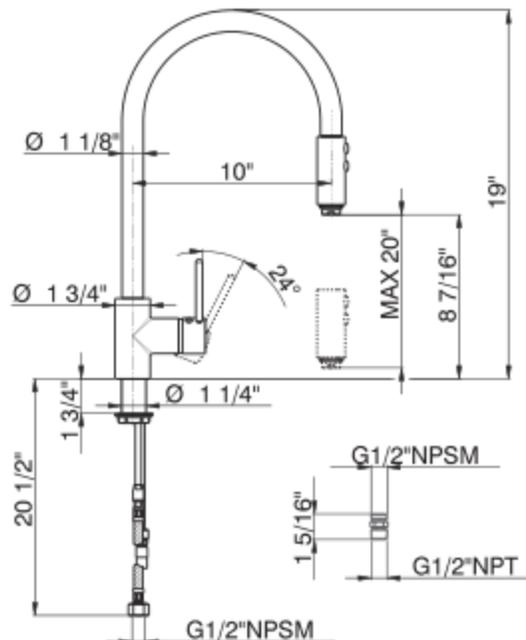

* For CA/VT, place a "-2" at end of model number for code compliant product. (Example A3608LMAPC-2)

Consult your local ROHL showroom for additional information and specifications. For complete warranty details and a list of showrooms, go to www.rohlhome.com.

ROHL

Authentic Luxury for Kitchen and Bath®



Modern Architectural Side Lever Pro Pulldown Kitchen Faucet

ROHL Modern Kitchen

LS64L*

FEATURES


- Metal lever only
- Dual spray modes
- Brass construction
- 1 3/4" max. installation depth on deck
- Ceramic disc control cartridge
- Available only in Polished Chrome
- 8 5/8" reach C-spout
- Spout is fixed, metal hose, handspray, and spring swivel

COLORS/FINISHES

- Polished Chrome

WARRANTY

- Limited Lifetime

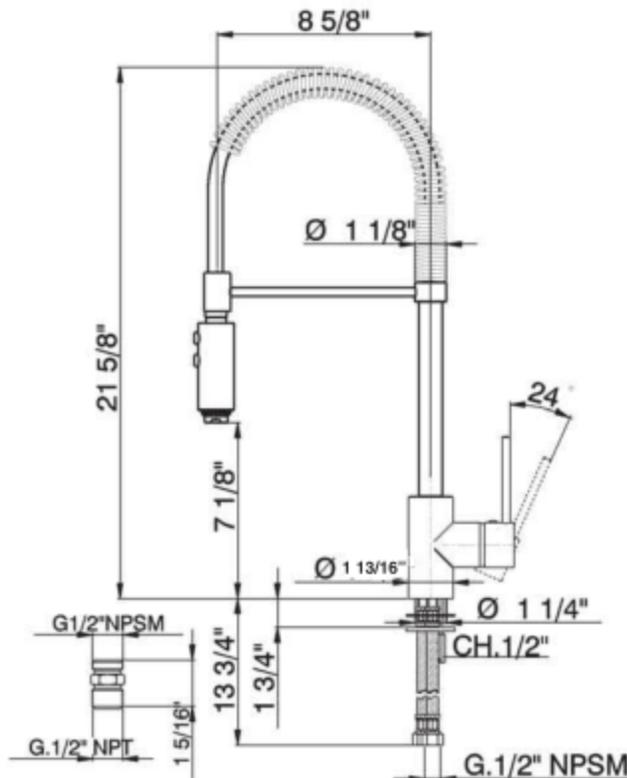

* For CA/VT, place a "-2" at end of model number for code compliant product. (Example A3608LMAPC-2)

Consult your local ROHL showroom for additional information and specifications. For complete warranty details and a list of showrooms, go to www.rohlhome.com.

EFTA00601942

32 665 Dual Spray Pull Down



Description

Solid Brass Body
GROHE SilkMove® Ceramic Cartridge
SpeedClean® Anti-Lime System
Locking Push Button Control -- to switch from regular flow to spray
Stainless Steel Braided Flexible Supplies
Quick Installation System
Single Lever Handle
Variable Handle Positioning
8 9/16" Spout Reach

Flow Rate


2.2 gpm at 60 psi, 2.5 gpm at 80 psi
(9.5 lpm)

Code Compliance


ASME/ANSI A112.18.1M
ASSE Standard 1016
ANSI/NSF Standard 61
CSA Standard B125.1-05
ADA Compliant

Finish Options

32 665 000 Starlight® Chrome

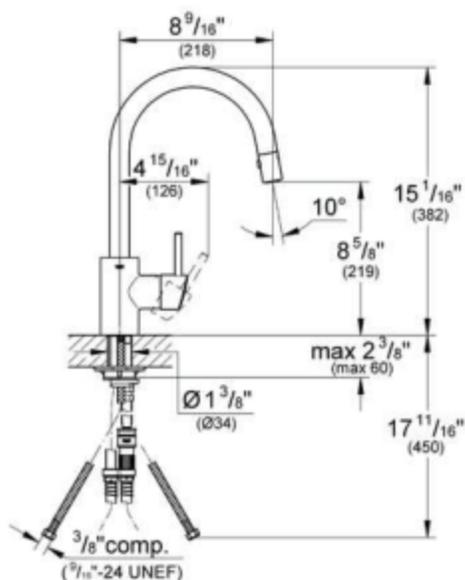

33 737 Dual Spray Pull-Out

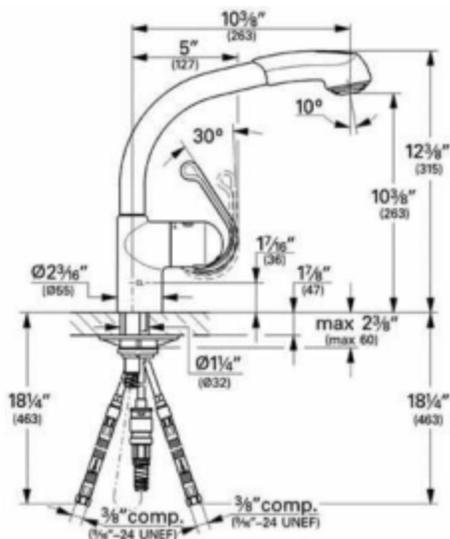

Description

Dual Spray Pull-Out
360° swivel spout
Dual spray control - switches back and forth between regular flow and spray
SpeedClean anti-lime system
Ceramic cartridge
56" extractable hose
10 3/8" spout reach
Quick installation system
Stainless steel braided flexible supplies
Integral check valves
Single hole installation

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

IAPMO File #1750

Flow Rate

2.2 gpm at 60 psi,
2.5 gpm at 80 psi (9.5 lpm)


Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61
ADA Compliant

Finish Options

33 737 000 Starlight® Chrome
33 737 IBO Chrome/Soft Black
33 737 DCO SuperSteel

33 759 High Profile Pull Out

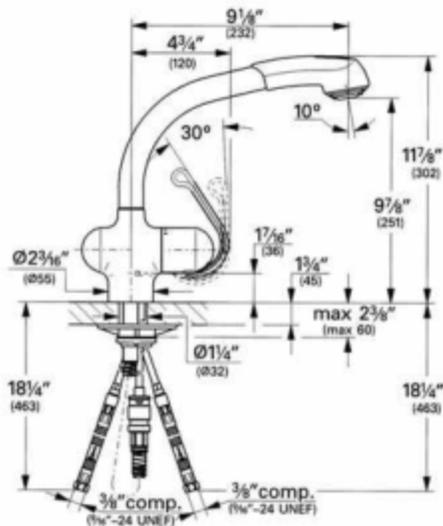

Description

Single-Handle Kitchen Pull-out
GROHE RealSteel® stainless steel construction
360° swivel spout
Dual spray control-switches back and forth between regular flow and spray
SpeedClean anti-lime system
Ceramic cartridge
56" extractable hose
9 1/8" spout reach
Quick installation system
Stainless steel braided flexible supplies
Integral check valves
Single hole installation

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

IAPMO File #1750

Flow Rate

2.2 gpm at 60 psi,
2.5 gpm at 80 psi (9.5 lpm)


Code Compliance

ASME/ANSI A112.18.1M
ANSI/NSF Standard 61
ADA Compliant

Finish Options

33 759 SDO Stainless Steel
33 759 KDO Stainless Steel/Black

32 245 Main Sink Dual Spray Pull-Down

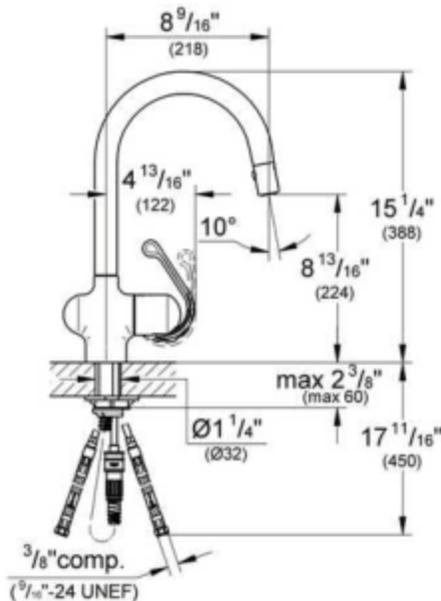

Description

GROHE RealSteel® - stainless steel construction
 GROHE SilkMove® ceramic cartridge
 SpeedClean® anti-lime system
 Locking Push Button Control - to switch from regular flow to spray
 Quick installation system
 Single lever handle
 Variable handle positioning
 Stainless steel braided flexible supplies
 56" extractable hose
 8 9/16" spout reach
 360° swivel spout

Note: Solid Stainless Steel Handle. Spray head in Stainless Steel InfinityFinish.

IAPMO file # 1750

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi
 (9.5 lpm)

Code Compliance

ASME/ANSI A112.18.1M
 ANSI/NSF Standard 61
 ADA Compliant

Finish Options

32 245 SDO Stainless Steel