


E ELEVATION  
(AS OUTBOARDS)


REVISION	ITER NO.	DESCRIPTION	REVISED BY AND DATE	EFFECTIVE ON
A	1	REMOVE ALISE LIGHT FROM FWD LH END CABINET	B. GERRACI 5/5/05	5063
B	1	ADDED CRASH PAD TO SECTION A/A	B. GERRACI 4/5/05	5063
B	2	ADDED FLOORWASH LIGHT TO SEAT	B. GERRACI 1/3/05	5063
C	1	ADD FLOORWASH LIGHT TO SEAT	B. GERRACI 6/8/05	5063
C	2	ADD FLOORWASH LIGHT TO SEAT	B. GERRACI 6/8/05	5063
D	1	ADD FLOORWASH LIGHT TO SEAT	B. GERRACI 6/9/05	5063
D	2	ADD FLOORWASH LIGHT TO SEAT	B. GERRACI 6/9/05	5063

NOTE:


- REFER TO THE FOLLOWING INDEX LISTS FOR A/C CONFIGURATION:  
GC528000241 IL-CABIN INTERIOR
- LIGHTS IN HEAD LINER ARE TO BE LOCATED APPROXIMATELY AS SHOWN. CHECK FUSELAGE STRUCTURE FOR INTERFERENCE PRIOR TO INSTALLATION.
- SWITCH PANEL CONFIGURATIONS ARE SHOWN FOR REFERENCE ONLY. UNDIMENSIONED ENERGY EQUIPMENT & ELECTRICAL COMPONENTS ARE SHOWN IN APPROXIMATE LOCATIONS.
- IF B. AND OVER CALL OUTS ON THE INDIVIDUAL CABINetry ASSY/INSTL DRAWING ARE CALLED OUT IN THIS DRAWING, THE INDIVIDUAL ASSY/INSTL DRAWING IS TO TAKE PRECEDENCE.
- ALISE WIDTH MUST BE NO LESS THAN 20" AT 25" OR MORE FROM FLOOR AND NO LESS THAN 12" AT A HEIGHT OF LESS THAN 25" FROM FLOOR. FORM AN A/C WITH A PASSENGER SEATING CAPACITY FROM 11 TO 15, PER FEDERAL REGULATIONS PART 25, 815.
- THERE MUST BE AN UNOBSTRUCTED 20" ALISE WIDTH BETWEEN INDIVIDUAL COMPARTMENTS, EACH PASSAGEWAY BETWEEN INDIVIDUAL PASSENGER AREAS, AND PASSAGEWAY LEADING TO TYPE 1 EMERGENCY EXITS PER FAR 25, 813 (a).
- ENSURE ALL DECOMPRESSION VENT LOCATIONS ARE FREE TO OPERATE AND ARE NOT BLOTTED BY INTERIOR DOORS, SEATS, OR PADDOING.
- SEE DRAWING GC52820176 FOR DECOMPRESSION FEATURE INSTALLED AT THIS LOCATION.
- SEE SEAT INSTALLATION DRAWING GC522080480 FOR SEAT TRAVEL LIMITATIONS.
- REMOVE COOK PRIOR TO INSTALLATION OF ASHTRAY INSERT. ENSURE THAT ALL OPEN HOLES IN CABINETS WHICH MAY INCLUDE THE INGRESS OF FOOD ARE PROTECTED.
- ADAPTABLE TO APPLY 3M ADPS ALUMINUM TAPE TO CUP HOLDER OVER DRIPLETTER TO ENSURE PROPER FIT OF CUP HOLDER IN CABINET. LEAVE ON TABLE.
- APPLY A SINGLE LAYER OF AR0090050L008-D LOOP AROUND THE OUTER CIRCUMFERENCE OF ALL ASHTRAY INSERTS.

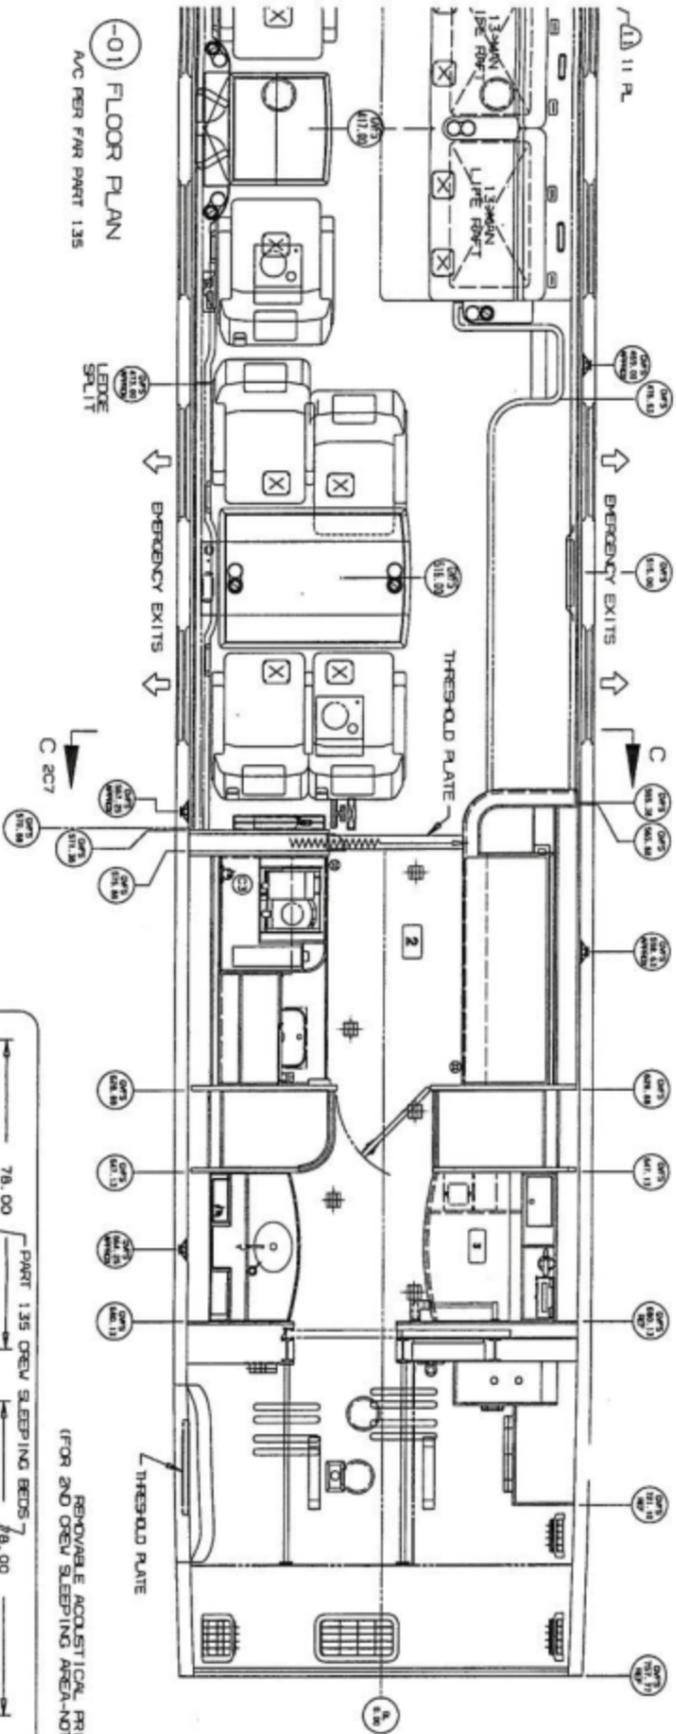

-01 FLOOR PLAN  
A/C PER FAR PART 135

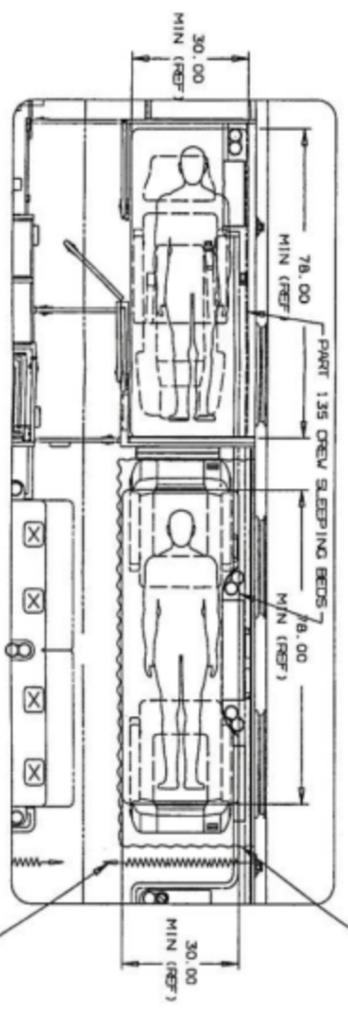

DET D 205 REMOVABLE ACOUSTICAL PRIVACY DRAPE  
(FOR 2ND CREW SLEEPING AREA)

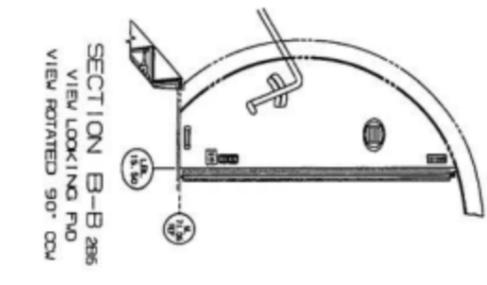

SECTION B-B 205  
VIEW LOOKING FWD  
VIEW ROTATED 90° CW



EXIT SIGN REF

REV. NO.	DATE	BY	DESCRIPTION
001	05/03	B. GERRACI	ISSUE FOR REVIEW
002	05/03	B. GERRACI	REVISED PER COMMENTS
003	05/03	B. GERRACI	REVISED PER COMMENTS
004	05/03	B. GERRACI	REVISED PER COMMENTS
005	05/03	B. GERRACI	REVISED PER COMMENTS
006	05/03	B. GERRACI	REVISED PER COMMENTS
007	05/03	B. GERRACI	REVISED PER COMMENTS
008	05/03	B. GERRACI	REVISED PER COMMENTS
009	05/03	B. GERRACI	REVISED PER COMMENTS
010	05/03	B. GERRACI	REVISED PER COMMENTS

**Gulfstream**  
AIRCRAFT FLOOR PLAN  
55734 J GC528000241 D  
COMPUTER GENERATED DWG USING CATIA

