

REFERENCE 3D Displays

TITAN Reference 1080p 3D



PERFORMANCE SPECIFICATIONS

Brightness ($\pm 10\%$)

4,000 - 6,000 ANSI Lumens
Integrator Adjustable

Contrast Ratio ($\pm 10\%$)

5000:1

Display Type

3 x .95" Dark Chip-4 1080p DMD™ with
Fast Transit Pixels for smooth
greyscale and improved contrast

DMD Specification

1920 x 1080 pixels native, 12° tilt angle

Fill Factor

87%

Sealed Optics at DMD™ Interface

Protects DMD's™ from optical contamination

Source Compatibility

- Composite, s-video, and color difference video standards
- RGB graphics standards up to 1920 x 1080
- DVI standards with HDCP compliance
- High definition RGB and color difference standards
- High definition / standard definition serial digital formats (SD/HD-SDI)
- High bandwidth - Dual DVI, and Dual-Twin DVI

Video Processing

- Enhanced 7 point color correction
- Dual Flash Processing™ increases 60 Hz inputs to 120 Hz displayed output
- FastFrame™ Motion Blur Reduction
- Xenon Color Mode - User selectable notch filter and xenon-color mode processing, enable the projector to replicate xenon lamp spectral performance
- Class leading Video de-interlacing/processing of SD and HD sources using auto 3:2 and 2:2 extraction, ruggedized for editing discontinuities
- Pixel-based motion adaptive interpolation
- User selectable preset, parametric de-gamma and user downloadable de-gamma
- Frame Delay: as low as 1 frame, source dependant
- Auto mode selection - plug and play setup

High Bandwidth Input

- 3D capable
- Pixel Mapped - with low latency
- FastFrame™ Motion Blur Reduction
- 120 Hz with no frame doubling

3D Sync

Sync In - External lock
Sync Out - Shutter glass control

Network Connection

LAN via RJ 45, Wireless 802.11b,
full protocol feature set

Lamp Type

Dual High Intensity Discharge modules
(2 x 350W)

Lamp Life (typical)*

4000 hours sequential lamp operation,
lamp low provides extended lamp life

Lens Mount

Zoom Lenses: Motorized horizontal and vertical
lens shift, zoom and focus
Fixed Lenses: Manual focus

Lens Shift (maximum)

Fixed 1.12 and Zoom Lenses:
• Vert: +0.7, -0.5 frame; Hor: ± 0.1875 frame
0.67 Fixed lens:
• Vert: ± 0.1 frame; Hor: ± 0.1 frame

Lens Options

0.67	:1 fixed	1.87-2.56	:1 zoom
1.12	:1 fixed	2.56-4.16	:1 zoom
1.16-1.49	:1 zoom	4.16-6.96	:1 zoom
1.39-1.87	:1 zoom	6.16-10.49	:1 zoom

- 1.12:1 Lenses include manual aperture
- High-contrast lenses available for 0.67:1 and all zoom lenses

Mechanical Mounting

- Front or rear table; Front or rear ceiling (ceiling mount optional)
- Rugged, staging tolerant chassis with integrated handles
- Optional RapidRig™ frame with integrated pitch, roll and yaw adjustments

Weight (chassis only)

68 lbs (31kg)

Overview

Digital Projection International (DPI), Texas Instruments' first DLP™ partner and the original innovator of the 3-chip DLP™ projector, proudly introduces the newest entry in our line of Active-3D capable home entertainment Reference Displays, the TITAN Reference 1080p 3D. Weighing in at just 31kg/68 lbs., the dual lamp TITAN Reference 1080p 3D employs the latest in Texas Instruments' Darkchip 1080p DLP™ technology to deliver up to 6000 ANSI lumens of razor sharp imagery through an amazingly rich 5000:1 contrast ratio.

The TITAN Reference 1080p 3D relies on key technological innovations such as DPI's Active-3D sideboard. The sideboard contains a "direct to DMD" high bandwidth input, which introduces less than one frame of latency. All 3-chip 3D units also include DPI's FastFrame™ technology, a revolutionary combination of hardware and firmware that provides user adjustments to vastly reduce the artifacts and image blur typically associated with rapidly moving display content. This is especially important when viewing sporting events or any other fast-moving entertainment content. Dual Flash Processing, an additional benefit to DPI's 3D displays, supports the display of 60 Hz sources at frame rates up to 120 Hz.

TITAN 3D models utilize the same lenses employed across the rest of DPI's TITAN and LIGHTNING product range, so optical accuracy is always ensured. Additionally, the Reference 1080p 3D includes DPI's exceptional ColorMax™ and Xenon Color Mode calibration systems, ensuring deeply saturated, color-accurate imagery which is simultaneously true to life and powerfully immersive. Compact, robustly built and ultra-quiet for its performance class, the TITAN Reference 1080p 3D is an unmatched solution for elite home cinemas and family media rooms.

Key benefits of the TITAN Reference 1080p 3D models include:

- High Bandwidth input >120Hz active stereoscopic DVI with no need for frame doubling. This capability extends the dynamic range up to 16 bit for improved contrast and color gamut.
- Dual Flash Processing™ (DFP) - Enables distribution of 3D content via 60 Hz formats by providing the option to frame-double the signal within the projector. When this option is selected, the input signal, having been processed and re-sized to map to the native resolution of the projector, will also be frame-doubled to 120 Hz, and the doubled frames interleaved. This produces imagery with the low flicker characteristics of a native 120 Hz source, but without the infrastructure costs associated with distributing and switching ultra-high bandwidth signals.
- Projector electronics which provide an interface to drive an infrared transmitter to synchronize switching glasses with active displayed frames. The user can elect either to pass through an external sync pulse, or to use the reference generated internally by the projector. Adjustments are provided to accommodate the phase and dead time characteristics of different switching glasses.
- FastFrame™ technology, a revolutionary combination of hardware and firmware that provides user adjustments to vastly reduce the artifacts and image blur typically associated with rapidly moving display content.
- Minimal video delay from input to screen - as low as 1 frame.
- Eight user-selectable inputs, including HDCP-compliant DVI plus SD/HD-SDI.
- High bandwidth DVI inputs offer Single, Twin, Dual & Dual Twin DVI connectivity.
- Up to 16 Bit color for breathtaking image reproduction.
- DPI's ColorMax™ calibration capabilities including enhanced seven-point color correction for broader color space and precise color alignment.
- DPI's CoolTek™ engineering, delivers the highest lumen performance with the lowest power consumption, thermal (BTU) and noise level (dBA) output.


As Hollywood focuses its production efforts on creating a wide array of new 3D content, Digital Projection International is pioneering the technological advances needed to deliver it to discerning home cinema enthusiasts worldwide. The TITAN Reference 1080p 3D represents DPI's dedication to that goal.

INPUT CAPABILITIES

Type	Connector	Quantity
Composite	BNC	1
S-Video	4-pin mini DIN	1
Component		
Interlaced/Std def Y, Cr/Pr, Cb/Pb, S	BNCx4	1
Graphics		
Progressive RGB/Progressive Interlaced Hi def Y, Cr/Pr, Cb/Pb	BNCx5	1
RGBHV (Progressive)	D sub (15-pin)	1
Digital RGB	DVI	1
Serial Digital SD/HD-SDI (SMPTE 259M/292M)	BNC	1
DVI - High bandwidth		
Dual - main	DVI	1
Dual - sub	DVI	1

TITAN Reference 1080 3D

DIGITAL PROJECTION

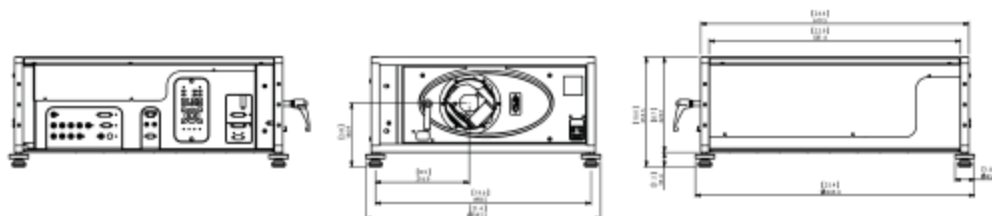

Projector Dimensions

Projector dimensions (in)
L1 25.4 W1 21.4 H1 10

Projector dimensions (mm)
L1 645.4 W1 543.5 H1 253.5



TITAN 1080p-3D side panel



ADVANCED TECHNICAL SPECIFICATIONS

PARAMETERS



Native Color Temperature

6500°K $\pm$ 1000°K; white balance-adjustment: 3000°K to 10000°K
User selectable Xenon-like colorimetry using dynamic optical and electronic enhancement.

HDTV Formats Supported

1080i (50Hz, 60Hz), 1080p (24Hz, 25Hz, 30Hz, 50Hz, 60Hz), 1080 24sf, 720p (50, 60Hz), 480i, 480p

Scan Rates Supported

Inputs 1-7: Horizontal: 15kHz to 100kHz / Vertical: 24Hz to 85Hz - Input 8: 3D progressive 576p up to 1080p @ 120Hz

Remote Control

Addressable IR remote control, wireless and wired with loop-through / On board invertable keypad

Automation Control

LAN connection via RJ45 / RS232 9-pin D type

Operating/Storage Temperature

Operating: 0 to 40°C / Storage: -10 to 50°C

Operating Humidity

20 to 80% non-condensing

Thermal Dissipation

2,777 BTU/hr

Fan Noise

Less than 45dBA

Power Requirements

100-240 VAC $\pm$ 10%, 50/60Hz single phase

Power Consumption

910 watts maximum

Projectors

TITAN Reference 1080p 3D

Part

109-324

Accessories

350 Watt Lamp & Housing* (2 required)

RapidRig™ Frame

TITAN 1080p 3D Series Adjustable Ceiling Mount

Infrared Remote (Replacement)

* Includes high-performance replacement air filter(s)

Part

108-772

107-956

108-499

105-023

Lenses

0.67:1

1.12:1

1.12:1 (short)

1.16-1.49:1

1.39 - 1.87:1

1.87 - 2.56:1

2.56 - 4.16:1

4.16 - 6.96:1

6.92-10.36:1

HB Part

105-607

105-608

105-609

109-236

105-610

105-611

105-612

105-613

109-235

1 Based on 4-6 hour/day operational profile. Venue and application conditions may impact actual lamp life.
See Digital Projection's Product Warranty Statement for details on lamp warranty.
Installations requiring horizontal or vertical tilt orientations greater than 15 degrees may reduce the actual operational hours of one of the two lamps.

DUAL FLASH
PROCESSING

FAST
FRAME

ColorMAX
COLORMAX

COOLTEK
COOLTEK

DLP
DIGITAL LIGHT PROCESSING

DIGITAL PROJECTION, INC. • 55 CHASTAIN ROAD, SUITE 115 KENNESAW, GA. 30144 • T: 770.420.1350 • F: 770.420.1360 •

DIGITAL PROJECTION, LTD. • GREENSIDE WAY, MIDDLETON MANCHESTER, UK. M24 1XX • T: +44.161.947.3300 • F: +44.161.684.7674 • www.digitalprojection.co.uk

DIGITAL PROJECTION, CHINA • TOWER C, RM C1202, CAI FU JIA YUAN, NO. 19 XIAO YING STREET, CHAOYANG DISTRICT BEIJING, PR CHINA 100101 • T: +86.10.58239771 • F: +86 10 58239770

DIGITAL PROJECTION, ASIA • 16 NEW INDUSTRIAL ROAD, #02-10 HUDSON TECHNOCENTRE SINGAPORE 536204 • T: +65.6284.1138 • F: +65.6284.1238

EFTA00730398