



**James,
Cooke, &
Hobson, Inc.**

QUOTATION #180201-4-zorro island

June 15, 2018

To: LSJE LLC	Job Name: LITTLE SAINT JAMES
Attn: BRICE GORDON	Location: SAINT THOMAS, USVI
Fax: emailed	Quotation By: Chuck Espinosa [REDACTED]
	Bid Date: 02/01/18


Unless otherwise stated: Prices are firm for 30 days from bid date, payment terms are NET 30 DAYS from shipment. Applicable taxes will be added to the invoice at rate in effect at time of shipment. Interest shall accrue on past due amounts at 1.5% per month. Freight terms are F.O.B. factory full freight allowed.

Qty	Description	Each	Total
	<p>CLARIFICATIONS:</p> <p>Installation by others. Pump Start up by others Freight, standard ground to Albuquerque INCLUDED NO VFD, control panel We need the linear distance to the control panel to customize. Pump Curve and Electrical data is below.</p>		
2	<p>FLYGT BS PUMP AND CABLE 4" NPT SH 278 CURVE 3/460/60, 15 HP MOTOR (2) PUMP 75ft of motor cable.</p> 	\$12,500.00	\$25,000.00

California Office Phone (949) 396-3001
 3516 Seagate Way, 110
 Oceanside, CA 92056

New Mexico Office Phone (505) 344-7100
 3810 Academy Parkway S NE
 Albuquerque, NM 87109

JCH recommendation is to use a pressure controlled VFD
To keep this pump on curve and at the desired flow.

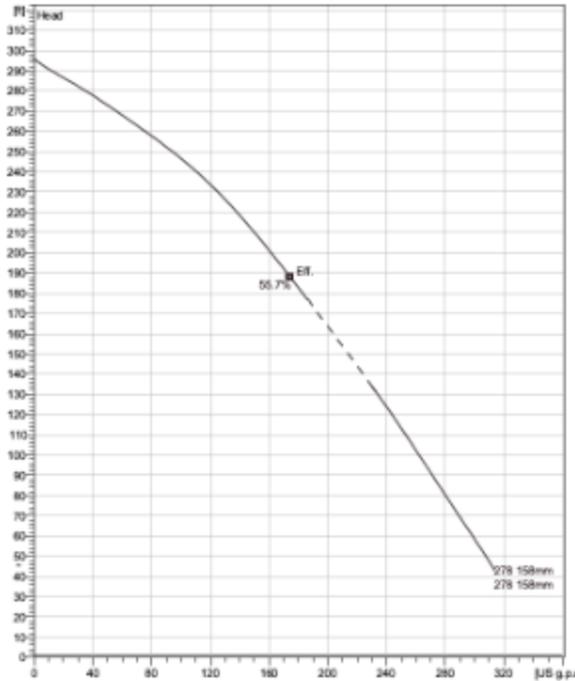

Motor

Motor #	B2660.181 18-15-2BB-W 15hp Standard
Stator variant	4
Frequency	60 Hz
Rated voltage	480 V
Number of poles	2
Phases	3~
Rated power	15 hp
Rated current	17 A
Starting current	117 A
Rated speed	3475 rpm
Power factor	
1/1 Load	0.88
3/4 Load	0.84
1/2 Load	0.74
Motor efficiency	
1/1 Load	87.8 %
3/4 Load	89.0 %
1/2 Load	89.0 %

1	<p>CUSTOM EG PANEL Pressure Transducer Series (3 pump operation allowed). Triplex, PLC pump Control Panel, UL 508 labeled Nema 3R, Aluminum Enclosure 3/480/60, Controlling (2) 15 hp, 21 NEC FLA motors</p> <ul style="list-style-type: none"> • Pressure Transducer with 30' of cable shipped loose for installation / 0-300 psi • PLC and HMI are coated to prevent corrosion • Incoming phase monitor • Run Time Meters • HOA for each pump • 110 duplex receptacle • (2) 15 hp drive. + with room for 1 more VFD and controls • PLC and HMI with 7" touch screen 	\$44,500.00	\$44,500.00