

# GLACIAL COLLECTION

The Glacial Collection's pure white tones offer the clean, neutral aesthetic so highly sought in modern design, thoughtfully stocked in two distinct shades of tile and slab. Polar White is a clean white glass, pure from edge to edge. Crystal White is less absolutely white, with a more crystalline character. Both are strong, durable, easy to maintain, and ideal for countertops and heavy traffic commercial floors.




PICTURED: GLACIAL POLAR WHITE GLOSS

# GLACIAL COLLECTION



Crystal White Gloss

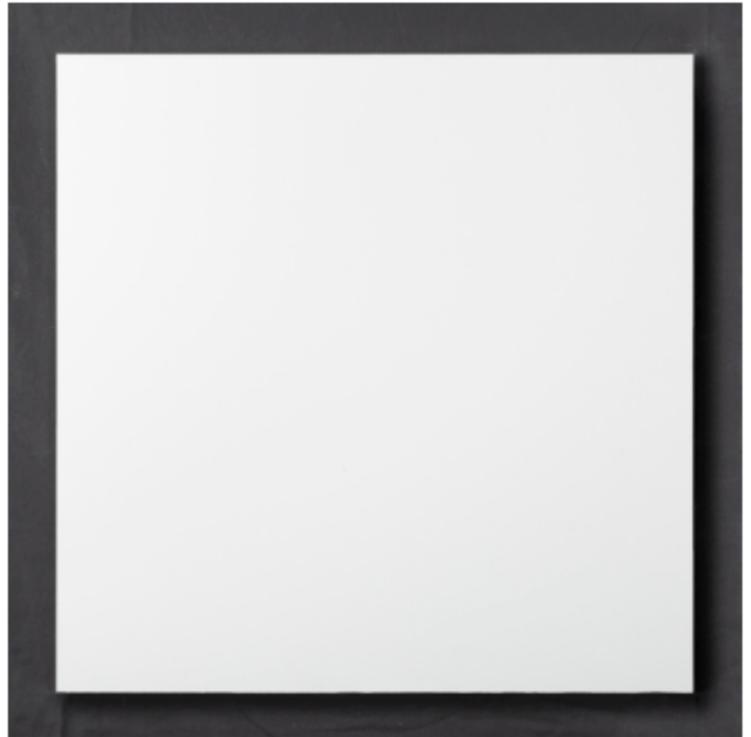

Polar White Gloss

APPLICATIONS								VARIATION			
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL*	POOL/ FOUNTAIN	COUNTER TOP				
Heavy Traffic Commercial	All	Yes, including steam	No	No	Yes	No	Yes				
INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	<p><b>FIELD TILE</b> 24" x 24" x 1/2"</p> <p><i>Crystal White Gloss &amp; Polar White Gloss</i></p> <p><b>SLAB</b> 118.11" x 55.11" x 3/4" (2CM) 118.11" x 55.11" x 1 1/4" (3CM)</p> <p><i>Polar White Gloss</i></p>	
See Notes Below	Mapei Ultracolor Plus Sanded	1/8" minimum	Mapei Mapei elastic AquaDefense	Mapei Keracaulk Sanded	Not Required	AquaMix Concentrated Stone & Tile Cleaner	See Notes Below	No	No		
NOTES											
<p>*Exterior Wall: Mechanical anchoring required.</p> <p>Setting Material: Ardex X77 (use E90 additive to increase bond in wet, submerged, exterior, or ceiling applications) Laticrete - 254 Platinum, Mapei Granirapid System (check with manufacturer for specific guidelines on ceiling, submerged or exterior applications) Please consult your preferred setting material manufacturer for a product recommendation to meet your project needs.</p> <p>Installation Instructions: For field tile use TCNA Handbook, for slab use MIA DSDM.</p> <p>The Glacial Collection must be cut with a segmented blade specifically designed for the cutting of Crystallized Glass Panels. Cutting must be performed at slow speed, with ample water to cool and lubricate the blade, and limit airborne dust. Alpha recommends the vetro blade for tile cutting on a hand held grinder or tub saw, available in 4", 6", 7", 8" or 10" diameters. Please consult with your preferred equipment supplier for a recommendation on specific blade for your project.</p> <p>Edges may be polished using polishing pads designed for crystal glass. Alpha Tools recommends the use of their Ceramic Ex Pads, available in 3", 4" and 5" diameters. Consult your equipment supplier for specific polishing pad recommendation for your equipment.</p> <p>Tile installation must be performed in accordance with the latest version of the Tile Council of North America Handbook, and subject to specific guidelines of the setting material manufacturer.</p> <p>It is recommended to always cut, profile and finish the Glacial Collection wet to reduce airborne dust.</p>											